



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

25124-1

12Kg Potassium Sulphate Powder FIRE EXTINGUISHER



CLIP DETAIL



- CYLINDER
Alloy steel, 3 pieces, with clip, epoxy-polyester powder painting, Red Ral 3000.
- EXTINGUISHING AGENT
Potassium Sulphate powder.
- PROPELLANT
Fire extinguisher pressurized at moment of use with gr.225 Co2 cartridge .
- VALVE
Aluminum percussion valve M 74 x 2.
- USE
B C fire rating
(flammable liquids, flammable gas).
- BRACKET
Wall-mounted red painting and PELD base, in standard equipment.

© REPRODUCTION IS PROHIBITED

12kg potassium sulphate powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.
Suitable for use on fire involving voltages of up to 1000 volts.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE
RATING :



233




12Kg Potassium Sulphate Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	233 B C
EXTINGUISHING AGENT	EPBC 2051 powder
PROPELLANT	Internal cartridge gr 225 Co2
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	12 Kg
FULL WEIGHT	~ 18,7 Kg
DIMENSIONS	Height 600 mm Diameter 182 mm
DISCHARGE TIME	30 sec.
MAX VALVE TIGHTENING	Between 35 and 45 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	12,2 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD :
nr. 30 pieces for pallet 100x120
in single packaging

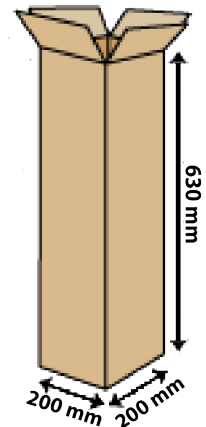

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

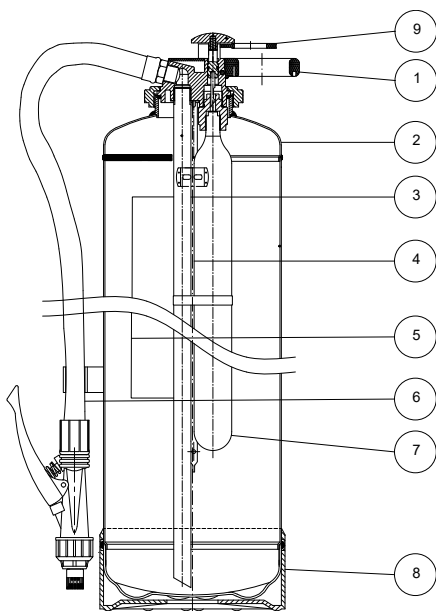

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 74 X 2	3008-1
2	Cylinder	3012
3	PVC dip tube	3035
4	Pressurization dip tube	3035-1
5	Label	3017-3
6	Hose	3014-2
7	gr 225 Co2 cartridge	3032
8	PELD base	3028
9	Safety pin	0285-1
	Safety pin seal	0285
	BC powder	2051

EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399
E-mail: info@emme-italia.com – web site: www.emme-italia.com
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_25124-1	25124-1	30/10/17	M.R		1	2