

EMME ANTINCENDIO S.r.l. www.emme-italia.com

22066-21

6L Foam FIRE EXTINGUISHER



- CYLINDER
 Alloy steel, deep drawing,
 epoxypolyestere powder painting,
 Red Ral 3000.
- EXTINGUISHING AGENT Water foam.
- PROPELLANT
 Dehumidified air or N₂.
- VALVE
 M. 30x1.5, brass body, levers with red painting Ral 3000.
- USE
 A B fire rating
 (solid materials, flammable liquids).
- BRACKET
 Wall-mounted for valve,
 in standard equipment.

Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. foam fire extinguisher, temperature range from 0°C to +60°C, manufactured in accordance to **EN 3-7:2008**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 35'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:














6 L. Foam FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

<u>- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1</u>				
FIRE RATING	27 A 233 B			
EXTINGUISHING AGENT	EWAB15 foam (2 % EW-B + 10 % EW-A + 88 % Water)			
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C			
TEMPERATURE RANGE	0°C / +60°C			
NOMINAL CHARGE	6 L.			
FULL WEIGHT	~ 9,4 Kg			
DIMENSIONS	Height 540 mm Diameter 160 mm			
DISCHARGE TIME	43 sec.			
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm			
CYLINDER PRESSURE TEST	PT 27 bar			
CYLINDER VOLUME	7,5 L.			
SAFETY VALVE	Set 20 and 26 bar			
CYLINDER MATERIAL	Alloy steel			
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour/ Internal plastic lining			

PACKAGING


STANDARD: maximum 100 pieces for pallet (44 pieces for box, max 2 boxes for pallet) (12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm



SINGLE PACKAGING ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm

Note: the packaging quantities and measurements are indicative and can be subject at changes



MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

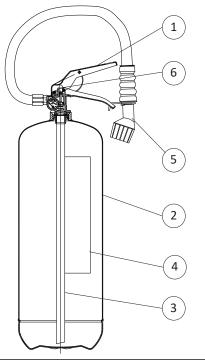

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22066-21	22066-21	07/05/19	M.R		2	2

SPARE PARTS

NUMBER	DESCRIPTION	CODE	
1	Valve M. 30x1.5	0212F	
2	Cylinder	0112	
3	PVC dip tube	0154	
4	Label	0083-21	
5	Hose with dispensing nozzle	0293	
6	Safety pin	0282-1	
	Safety valve	0261	
	Safety pin seal	0285	
	EWAB15 foam (6 L. Recharge, ready to use)	2054-1	

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy info@emme-italia.com - Tel. +39.0575.511320
Others Emme Antincendio s.r.l. warehouses in Italy: Milano - Padova - Reggio Emilia P.IVA/ C.F. 11208251006 - R.E.A. FI-632545