



# 32094-1

## 9 L. Foam FIRE EXTINGUISHER



CLIP DETAIL

- **CYLINDER**  
Alloy steel, deep drawing, with clip, epoxy polyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**  
Water foam.
- **PROPELLANT**  
Fire extinguisher pressurized at moment of use with gr. 75 CO<sub>2</sub> cartridge.
- **VALVE**  
M. 74x2, lightweight aluminum alloy, activation with percussion method.
- **USE**  
A B fire rating (solid materials, flammable liquids).
- **BRACKET**  
Wall-mounted bracket for fire extinguisher with clip, red painting, in standard equipment.

Note: image is for illustrative purpose only, the product purchased can have some differences


9 L. foam fire extinguisher, pressurized at moment of use, temperature range from +5°C to +60°C, manufactured in accordance to **EN 3-7:2008**, approved to European Marine Directive **MED 2014/90/EU, S.O.L.A.S.** (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 35'000 V, at a distance of 1 mt.

### AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	33094-1	9 L. foam fire extinguisher, complies <b>MED 2014/90/EU</b>

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE RATING :**



43

233


## 9 L. Foam FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS

FIRE RATING	43 A 233 B
EXTINGUISHING AGENT	EWAB15 foam (1,5 % SC 6 + 7 % Inilam AX + 91,5 % Water)
PROPELLANT	Internal cartridge with gr. 75 CO <sub>2</sub>
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	9 L.
FULL WEIGHT	~ 15,5 Kg
DIMENSIONS	Height 560 mm Diameter 180 mm
DISCHARGE TIME	52 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,5 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyester powder painting, Red Ral 3000 colour/ Internal plastic lining

### PACKAGING

STANDARD : maximum 30 pieces on pallet 100x120x75(h) cm in single packaging

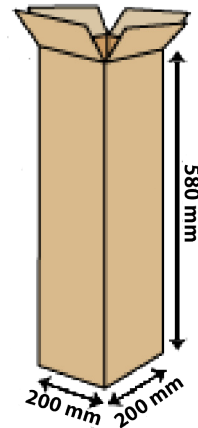


*Note: the packaging quantities and measurements are indicative and can be subject at changes*

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

### SPARE PARTS

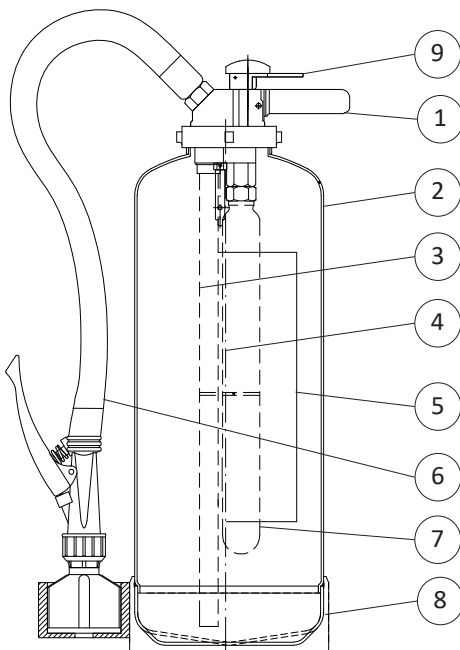

NUMBER	DESCRIPTION	CODE
1	Valve M. 74x2	3008-1
2	Cylinder	3010
3	PVC dip tube	2180-1
4	Pressurization dip tube	3033-1
5	Label 32094-1	2247
	Label 33094-1	2247-1
6	Hose	3014-3
7	gr. 75 CO <sub>2</sub> cartridge	3029
8	PELD base	3028-1
9	Safety pin	0285-1
	Safety pin seal	0285
	EWAB15 foam (9 L. recharge, ready to use)	2055-1

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_32094-1	32094-1	06/02/19	M.R		1	2

**EMME ANTINCENDIO S.r.l**  
Via del Molino, 40 - 52010 Corsalone (AR) - Italy  
info@emme-italia.com - Tel. +39.0575.511320  
Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545