



EMME ANTINCENDIO S.r.l.  
www.emme-italia.com

21063-79

6 Kg Powder FIRE EXTINGUISHER



CLIP DETAIL



- CYLINDER  
Alloy steel, 3 pieces drawing, with clip, epoxy polyester powder painting, Red Ral 3000.
- EXTINGUISHING AGENT  
ABC Powder - MAP 20 %.
- PROPELLANT  
Dehumidified air or N<sub>2</sub> .
- VALVE  
M. 30x1.5, lightweight aluminum alloy AA6061 body, levers with red painting Ral 3000.
- USE  
A B C fire rating (solid materials, flammable liquids, flammable gas).

Note: image is for illustrative purpose only, the product purchased can has some differences

6 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7:2008, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

© REPRODUCTION IS PROHIBITED

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



34



233




## 6 Kg Powder FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS

FIRE RATING	34 A 233 B C
EXTINGUISHING AGENT	EPW 18462 (ABC Favorit Tertia) ABC powder - MAP 20 %
PROPELLANT	Dehumidified air or N <sub>2</sub> ,15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 9,5 Kg
DIMENSIONS	Height 510 mm Diameter 160 mm
DISCHARGE TIME	28,5 sec.
VALVE TIGHTENING TORQUE	Minimum 35 Nm, Maximum 55 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,3 L.
SAFETY VALVE	Set between 22 and 27 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


### PACKAGING

STANDARD : maximum 100 pieces for pallet  
(44 pieces for box, max 2 boxes for pallet)  
(12 pieces in single packaging)  
Pallet dimensions 100x120x160(h) cm

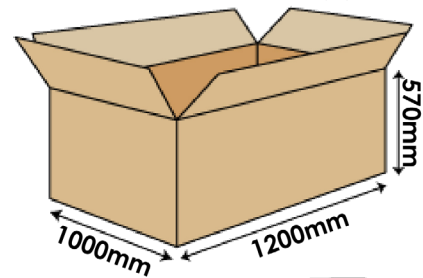

SINGLE PACKAGING  
ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



*Note: the packaging quantities and measurements are indicative and can be subject at changes*

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

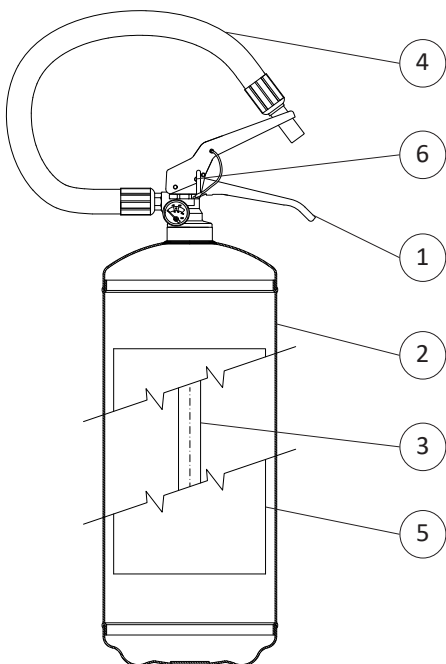

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212-9
2	Cylinder	1848K-1
3	PVC dip tube	1859
4	Hose	0292
5	Label	1880-5
6	Safety pin	0282-1
	Safety pin seal	0285
	ABC powder - MAP 20 % (6 Kg recharge)	18462-1
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip, red painting	3036

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_21063-79	21063-79	21/12/17	M.R	M.P.	1	2

### EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy  
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia  
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545