



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

22062-24

6 L. Water + Additive FIRE EXTINGUISHER



CLIP DETAIL



- CYLINDER
Stainless steel AISI 304, 3 pieces drawing, with clip, epoxy polyester powder painting, Red Ral 3000.
- EXTINGUISHING AGENT
Water foam.
- PROPELLANT
Dehumidified air or N₂.
- VALVE
M. 58x2, lightweight aluminum alloy AA6061 body, with external check valve, levers with black painting.
- USE
A B F fire rating (solid materials, flammable liquids, cooking oils).

Note: image is for illustrative purpose only, the product purchased can has some differences

6 L. water + additive fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to UNI EN 3-7, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



21

183

40

© REPRODUCTION IS PROHIBITED


6 L. Water + Additive FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	21 A 183 B 40 F
EXTINGUISHING AGENT	99 % Water + 1 % EW-B (orchidee)
PROPELLANT	Dehumidified air or N ₂ ,15 Bar at 20°C
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	6 L.
FULL WEIGHT	~ 8,6 Kg
DIMENSIONS	Height(base-valve) 550 mm Diameter 160 mm
DISCHARGE TIME	21 sec.
VALVE TIGHTENING TORQUE	Minimum 40 Nm, Maximum 60 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	7,8 L.
SAFETY VALVE	Set 22 and 27 bar
CYLINDER MATERIAL	Stainless steel AISI 304
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


PACKAGING

STANDARD : maximum 100 pieces for pallet
(44 pieces for box, max 2 boxes for pallet)
(12 pieces in single packaging)
Pallet dimensions 100x120x160(h) cm

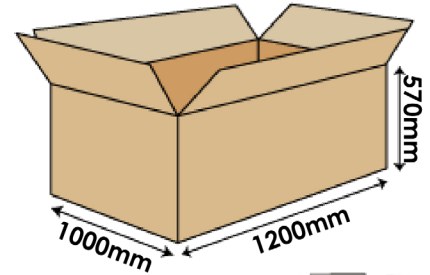

SINGLE PACKAGING
ON REQUEST:


- maximum 64 pieces on pallet 100x120 cm
- maximum 48 pieces on pallet 80x120 cm



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

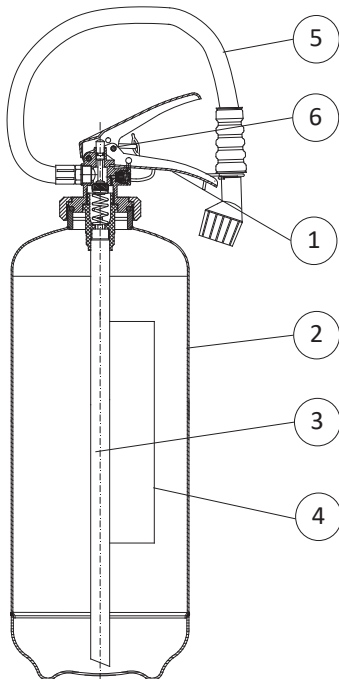

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 58x2	0212-5
2	Cylinder	1529-2
3	PVC dip tube	0154
4	Label	0086-24
5	Hose with dispensing nozzle	2209
6	Safety pin	0282-2
	Safety valve	0261-40
	Safety pin seal	0285
	Water + additive EW-B (6 L. Recharge, ready to use)	2054-9
OPTIONAL	Wall-mounted bracket for cylinder with clip, red painting	3036

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_22062-24	22062-24	17/04/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545