



EMME ANTINCENDIO S.r.l.
www.emme-italia.com

25099

9 Kg D Powder FIRE EXTINGUISHER



- **CYLINDER**
Alloy steel, 3 pieces drawing, epoxy polyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**
D powder .
- **PROPELLANT**
Dehumidified air or N₂ .
- **VALVE**
CPF M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**
D fire rating
(recommended in environments with risks arising from the presence of flammable metal).

Note: image is for illustrative purpose only, the product purchased can has some differences

9 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE
RATING :**



25099


9 Kg D Powder FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS


FIRE RATING	D
EXTINGUISHING AGENT	EPD 0356 (PRO-M) - D powder
PROPELLANT	Dehumidified air or N ₂ , 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	9 Kg
FULL WEIGHT	~ 14,5 Kg
DIMENSIONS	Height(base-valve) 630 mm Diameter 170 mm
DISCHARGE TIME	23 sec.
VALVE TIGHTENING TORQUE	Minimum 45 Nm, Maximum 68 Nm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,7 L.
SAFETY VALVE	Set between 20 and 24 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyestere powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 40 pieces for pallet
(40 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x80(h) cm

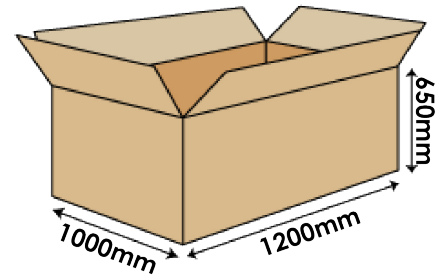


SINGLE PACKAGING
ON REQUEST:
- maximum 40 pieces
on pallet 100x120



Note: the packaging quantities and measurements are indicative and can be subject at changes

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

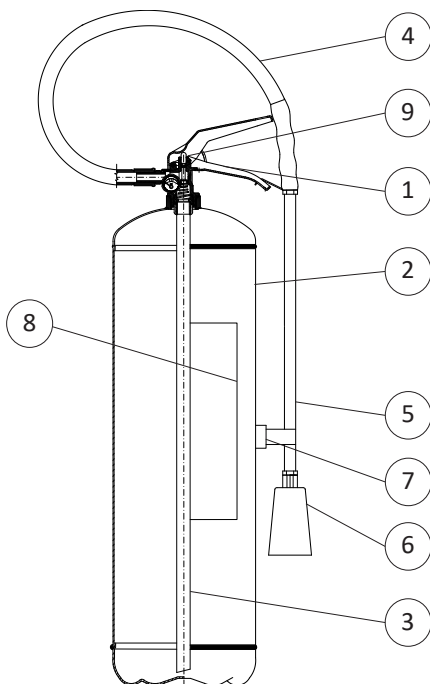

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212C
2	Cylinder	0105-1
3	PVC dip tube	0155-1
4	Hose	SL0293
5	Extension hose	1778-2
6	Horn	2259-41
7	Magnet stop hose	0301-1
8	Label	9304
9	Safety pin	0282C
	Safety valve	0261C
	Safety pin seal	0285

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_25099	25099	06/04/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
P.IVA/ C.F. 11208251006 - R.E.A. FI-632545