



EMME ANTINCENDIO S.r.l.  
www.emme-italia.com

24063-3

6Kg Powder FIRE EXTINGUISHER



- **CYLINDER**  
Alloy steel, 3 pieces, epoxy polyestere powder painting, Red Ral 3000.
- **EXTINGUISHING AGENT**  
ABC powder.
- **PROPELLANT**  
Fire extinguisher pressurized at moment of use with gr.150 CO<sub>2</sub> cartridge .
- **VALVE**  
Aluminum percussion valve M 74 x 2.
- **USE**  
A B C fire rating  
(solid materials, flammable liquids, flammable gas).
- **BRACKET**  
Wall-mounted red painting and PELD base, in standard equipment.

6Kg powder fire extinguisher, pressurized at moment of use, temperature range from -30°C to +60°C, manufactured in accordance to EN 3-7:2008, approved to European Marine Directive MED 2014/90/EU, S.O.L.A.S. (Safety of life at sea) '74 (2000), certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving voltages of up to 1000 volts.

AVAILABLE VERSIONS



N.	CODE	DESCRIPTION
1	29063	6kg powder fire extinguisher, complies MED 2014/90/EU

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



34



233



✓


## 6Kg Powder FIRE EXTINGUISHER

### TECHNICAL SPECIFICATIONS

FIRE RATING	34 A 233 B C
EXTINGUISHING AGENT	EPW 18462 powder
PROPELLANT	Internal cartridge gr 150 CO <sub>2</sub>
TEMPERATURE RANGE	-30°C +60°C
NOMINAL CHARGE	6 Kg
FULL WEIGHT	~ 10,5 Kg
DIMENSIONS	Height 505 mm Diameter 150 mm
DISCHARGE TIME	15,5 sec.
MAX VALVE TIGHTENING	Between 35 and 45 Nm
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	6,7 L.
SAFETY VALVE	Set 24 +/- 2 bar
CYLINDER MATERIAL	Alloy steel
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxypolyestere powder painting, Red Ral 3000 colour


### PACKAGING

STANDARD :  
nr. 30 pieces for pallet 100x120  
in single packaging

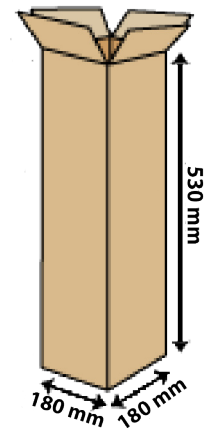

### MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the norm in use in utilization country.

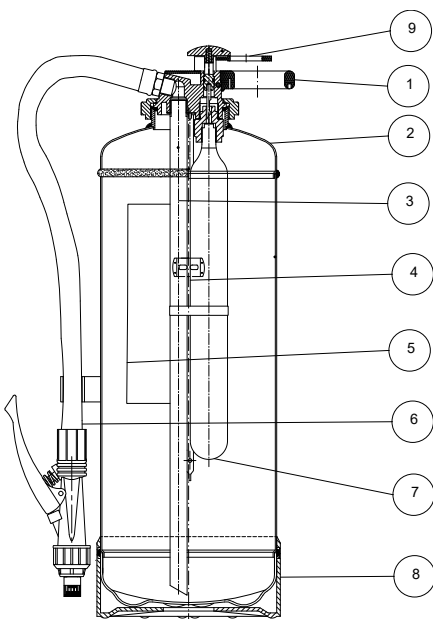

### SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M 74 X 2	3008-1
2	Cylinder	3011-1
3	PVC dip tube	3033
4	Pressurization dip tube	3033-1
5	Label	3015
6	Hose	3014
7	gr 150 CO <sub>2</sub> cartridge	3030
8	PELD base	1862-6
9	Safety pin	0285-1
	Safety pin seal	0285
	ABC powder	18462

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_24063-3	24063-3	28/12/17	M.R	MR	1	2

### EMME ANTINCENDIO S.r.l

Factory: Via del Molino, 40 – 52010 Corsalone (AR) – Italy – Tel. +39.0575.511320  
Warehouse: Via G. Di Vittorio, 11 – 20017 Mazzo di Rho (MI) – Italy – Tel. +39.0293900399  
E-mail: [info@emme-italia.com](mailto:info@emme-italia.com) – web site: [www.emme-italia.com](http://www.emme-italia.com)  
P.IVA/ C.F. 11208251006 – R.E.A. FI-632545