Technical Manual





www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320 Other branchesin Italy: Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

19118 - Lombardia 18260: Wheeled Fire Extinguisher, 100 L Foam



- CYLINDER
 Stainless steel AISI 304,
 powder painting, Red Ral 3000
- EXTINGUISHING AGENT Water based foam.
- PROPELLANT
 Dehumidified air or Nitrogen (N₂).
- VALVE 2"-F, brass body, lever with greer painting Ral 6029.
- USE
 A B fire rating
 (solid materials, flammable liquids)
- BRACKET
 Chassis on wheels, welded at the cylinder, red painting Ral 3000.

Note: image is for illustrative purpose only, the product purchased can have some differences

100 L foam wheeled fire extinguisher, temperature range from +5°C to +60°C, manufactured in accordance to **UNI EN 1866-1 (D.M. 6.3.92)**, certified according to the directive for pressure equipment PED 2014/68/EU. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 meter.

APPROVED\CERTIFIED FIRE EXTINGUISHER:











FIRE RATING:





I۱

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19118_Technical Manual	Technical Manual	19118 Lombardia 18260	01/08/2024	M.R		2	1/3

REPRODUCTION IS PROHIBITED

19118 - Lombardia 18260 : Wheeled Fire Extinguisher, 100 L Foam

INSTALLATION

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

MAINTENANCE

• USE

The technician will carry out annual inspection for check the internal pressure and after all other steps planned during the fire extinguisher useful life.

Any tampering or operation performed by unqualified technician, void the product warranty. If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents.

For installation, use and maintenance follow as indicated in file: CSP_1_ENG

TECHNICAL SPECIFICATIONS

FIRE RATING	AIVB
EXTINGUISHING AGENT	Water based foam (2 % SC-6 orchidee + 98 % Water) (* Hyper-filtered water with an osmosis process)
PROPELLANT	Dehumidified air or Nitrogen (N_2), 15 Bar at 20 $^{\circ}$ C
TEMPERATURE RANGE	+5°C / +60°C
NOMINAL CHARGE	100 Liters
FULL WEIGHT	~ 151 Kg
DIMENSIONS	Height 1350 +/- 10 mm ; Width 595 +/- 10 mm Depth 550 +/- 15 mm
DISCHARGE TIME	~ 89 seconds
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	134 L
SAFETY DEVICE	Set between 21 and 26 bar
CYLINDER MATERIAL	Stainless steel AISI 304
TREATMENT	Outside: Sandblast and powder painting Ral 3000


PACKAGING

(Note: the packaging quantities and measurements are indicative and can be subject at change)

STANDARD

Maximum nr. 4 pieces for pallet

Pallet dimensions 100x120x150(h) cm




TRANSPORT DISPOSAL

Land transport: Exemption for the purposes of ADR disposal 594 Ship Transport: IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19118_Technical Manual	Technical Manual	19118 Lombardia 18260	01/08/2024	M.R		2	2/3

19118 - Lombardia 18260 : Wheeled Fire Extinguisher, 100 L Foam

COMPONENTS AND SPARE PARTS LIST

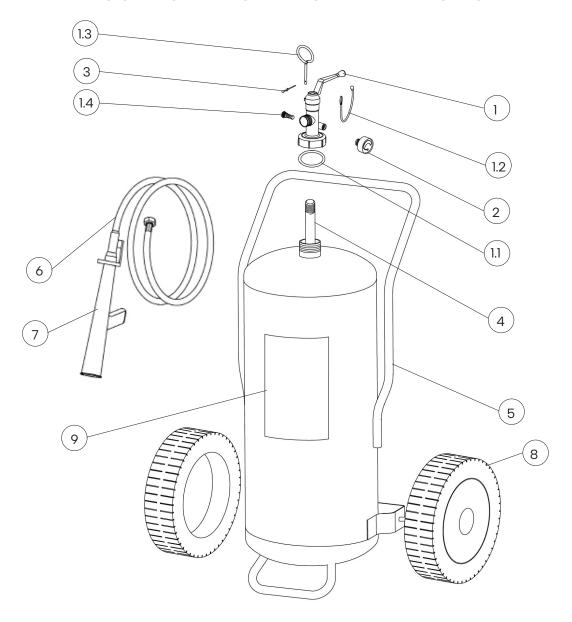

NUM.	DESCRIPTION	CODE
1	Valve 2''-F	0214RV
1.1	O-ring valve	0203
1.2	Tamper seal	0286N
1.3	Safety pin	0283R
1.4	Safety device	0263R
2	Pressure gauge	1576
3	Safety pin seal	0285
4	PVC dip tube	0165
5	Cylinder	18339

NUM.	DESCRIPTION	CODE	
6	Hose	18422	
7	Dispensing nozzle (complete of ball valve with control lever and inox filter for foaming)	2181-3	
0	Wheel + cotter pin (diam. 400mm)	0125	
8	Thick washer	2148-10	
9	Label	18344	
	Additive for refill (1 Lt. concentrate – To mix with water, for one refill)		

The spare part at number 1, includes already others components from 1.1 to 1.4

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
19118_Technical Manual	Technical Manual	19118 Lombardia 18260	01/08/2024	M.R		2	3/3