Technical Manual





Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320 Other branches in Italy : Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

21095-4 : Portable Fire Extinguisher, 9 Kg ABC Powder



Note: image is for illustrative purpose only, the product purchased can has some difference

9 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:							
D.M. 7 Grennalo 2005			5	55	233	<u> </u>	
File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21095-4_Technical manual	Technical manual	21095-4	14/10/2024	M.R		2	1/3

21095-4 : Portable Fire Extinguisher, 9 Kg ABC Powder

INSTALLATION

• USE

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

MAINTENANCE

The technician will carry out annual inspection for check the internal pressure and after all other steps planned during the fire extinguisher useful life.

Any tampering or operation performed by unqualified technician, void the product warranty. If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents. For installation, use and maintenance follow as indicated in file : EPP_1_ENG


TECHNICAL SPECIFICATIONS

FIRE RATING	55 A 233 B C
EXTINGUISHING AGENT	ABC powder - MAP 20 % EPW 18462 (ABC Favorit Tertia - Rühl)
PROPELLANT	Dehumidified air or Nitrogen (N ₂), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	9 Кд
FULL WEIGHT	~ 14,0 Kg
DIMENSIONS	Height (base - valve) 635 +/- 5 mm Diameter (cylinder) 170 +/- 2 mm
DISCHARGE TIME	~ 23 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,7 Liters
SAFETY DEVICE	Set between 20 and 26 bar
CYLINDER MATERIAL	Steel alloy
TREATMENT	Outside: Sandblast and powder painting, Ral 3000

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD Maximum nr. 40 pieces for pallet (40 pieces for box, max 1 box for pallet) Pallet dimensions 100x120x80(h) cm




TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594 Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers


File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21095-4_Technical manual	Technical manual	21095-4	14/10/2024	M.R		2	2/3

- maximum 40 pieces on pallet 100x120

ON REQUEST: SINGLE PACKAGING



21095-4 : Portable Fire Extinguisher, 9 Kg ABC Powder

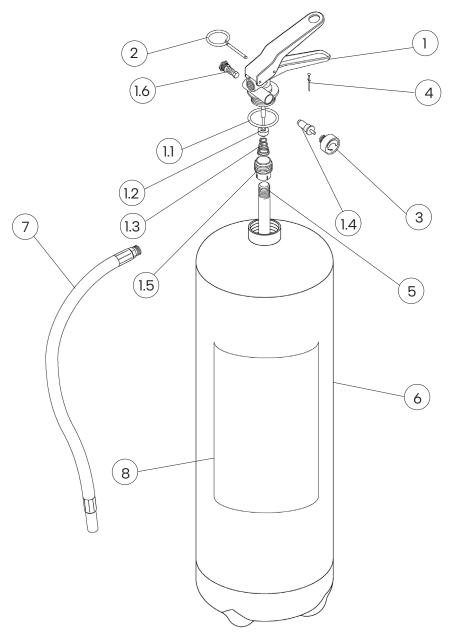

COMPONENTS AND SPARE PARTS LIST

NUM.	DESCRIPTION	CODE
1	Valvola M. 30x1.5	0212
1.1	O-ring valve	0201R
1.2	Valve stem	0242R
1.3	Internal spring of the valve	0251R
1.4	Test valve for pressure gauge	1163
1.5	Dip tube holder	0253R
1.6	Safety device	0261R
2	Safety pin	0282-1
3	Pressure gauge	0271-1

NUM.	DESCRIPTION	CODE	
4	Safety pin seal	0285	
5	PVC dip tube	0155-1	
6	Cylinder	0105-7	
7	Hose	0292-4	
8	Label	0057-4	
OPTIONAL	Iron marine bracket red painting	0318-1	
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036	

REPRODUCTION IS PROHIBITED

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
21095-4_Technical manual	Technical manual	21095-4	14/10/2024	M.R		2	3/3