# **Technical Manual**





Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320 Other branches in Italy : Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

### 22062-4 : Portable Fire Extinguisher, 6 L Foam



Note: image is for illustrative purpose only, the product purchased can has some difference

6 L foam fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a minimum distance of 1 meter.

| File name       Type of document       Fire Extinguisher Model       Date       Rele.       Check       Rev.       Pag.         22062-4_Technical manual       Technical manual       22062-4       30/09/2024       M.R       2       2/3 | APPROVED/CERTIFIED FIRE EXTING | SUISHER:<br>****<br>**** EN 3-10<br>Inspection Certificate<br>N* 55840/21/NIMI/nmi | FIRE<br>RATING :        |            | <b>, / , A</b> | 18    | <b>B</b> |      |
|--|--------------------------------|--|-------------------------|------------|----------------|-------|----------|------|
| 22062-4_Technical manual         Technical manual         22062-4         30/09/2024         M.R         2         2/3   | File name                      | Type of document   | Fire Extinguisher Model | Date       | Rele.          | Check | Rev.     | Pag. |
|  | 22062-4_Technical manual       | Technical manual   | 22062-4                 | 30/09/2024 | M.R            |       | 2        | 2/3  |

## 22062-4 : Portable Fire Extinguisher, 6 L Foam

#### INSTALLATION

• USE

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

MAINTENANCE

The technician will carry out annual inspection for check the internal pressure and after all other steps planned during the fire extinguisher useful life.

Any tampering or operation performed by unqualified technician, void the product warranty. If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents. For installation, use and maintenance follow as indicated in file : PSP\_1\_ENG

#### TECHNICAL SPECIFICATIONS


| FIRE RATING            | 21 A 183 B   |
|------------------------|--|
| EXTINGUISHING AGENT    | Foam EW-30 (100 % Premix MG6 -30)  |
| PROPELLANT             | Dehumidified air or Nitrogen (N <sub>2</sub> ), 15 Bar at 20°C             |
| TEMPERATURE RANGE      | -30°C / +60°C  |
| NOMINAL CHARGE         | 6 Liters   |
| FULL WEIGHT            | ~ 10,4 Kg  |
| DIMENSIONS             | Height (base - valve) 540 +/- 5 mm<br>Diameter (cylinder) 160 +/- 2 mm     |
| DISCHARGE TIME         | ~ 41,7 seconds   |
| CYLINDER PRESSURE TEST | PT 27 bar  |
| CYLINDER VOLUME        | 7,5 Liters   |
| SAFETY DEVICE          | Set between 20 and 26 bar  |
| CYLINDER MATERIAL      | Steel alloy  |
| TREATMENT              | Outside: Sandblast and powder painting Ral 3000<br>Inside: Plastic coating |

#### PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

ON REQUEST: SINGLE PACKAGING


- maximum 64 pieces on pallet 100x120
- maximum 48 pieces on pallet 80x120
- STANDARD Maximum nr. 100 pieces for pallet (44 pieces for box, max 2 boxes for pallet) (12 pieces. single packaging) Pallet dimensions 100x120x160(h) cm




TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594 Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers

| File name                | Type of document | Fire Extinguisher Model | Date       | Rele. | Check | Rev. | Pag. |
|--------------------------|------------------|-------------------------|------------|-------|-------|------|------|
| 22062-4_Technical manual | Technical manual | 22062-4                 | 30/09/2024 | M.R   |       | 2    | 2/3  |



# 22062-4 : Portable Fire Extinguisher, 6 L Foam

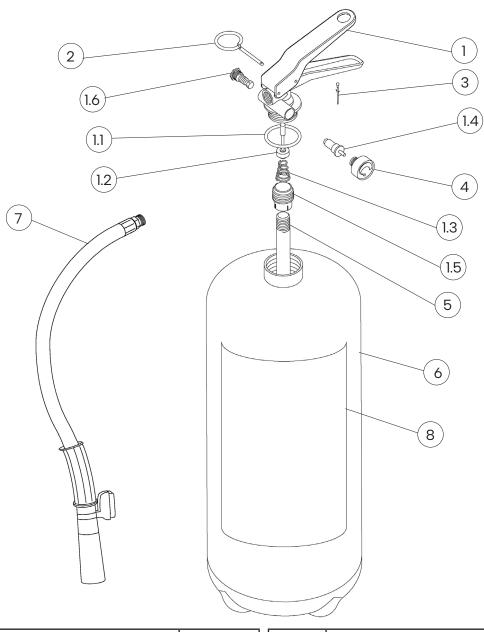

### COMPONENTS AND SPARE PARTS LIST

| NUM. | DESCRIPTION                   | CODE   |
|------|-------------------------------|--------|
| 1    | Valve M. 30x1.5               | 0212FV |
| 1.1  | O-ring valve                  | 0201R  |
| 1.2  | Valve stem                    | 0242R  |
| 1.3  | Internal spring of the valve  | 0251R  |
| 1.4  | Test valve for pressure gauge | 1163   |
| 1.5  | Dip tube holder               | 0253R  |
| 1.6  | Safety device                 | 0261R  |
| 2    | Safety pin                    | 0282-1 |
| 3    | Safety pin seal               | 0285   |
| 4    | Pressure gauge                | 1576   |

| DESCRIPTION  | CODE   |  |
|--|--|--|
| PVC dip tube   | 0154   |  |
| Cylinder   | 0112-3   |  |
| Hose with dispensing nozzle<br>and magnet            | 0293-9   |  |
| Label  | 0086-4   |  |
| Wall-mounted bracket for fire extinguisher with clip | 3036   |  |
| Foam refill<br>(6 L bottle, ready to use)            | 1623   |  |
|  | Cylinder<br>Hose with dispensing nozzle<br>and magnet<br>Label<br>Wall-mounted bracket for fire<br>extinguisher with clip<br>Foam refill |  |

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

| File name                | Type of document | Fire Extinguisher Model | Date       | Rele. | Check | Rev. | Pag. |
|--------------------------|------------------|-------------------------|------------|-------|-------|------|------|
| 22062-4_Technical manual | Technical manual | 22062-4                 | 30/09/2024 | M.R   |       | 2    | 3/3  |