# **Technical Manual**





Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320 Other branches in Italy : Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

### 22094-2: Portable Fire Extinguisher, 9 L Foam



Note: image is for illustrative purpose only, the product purchased can has some difference

9 L foam fire extinguisher, temperature range from 0°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:									
MPA Dresden	EN 3-10 Inspection Certificate N* 55840/21/NMJ/nmj	FIRE RATING :							
* * * * (N* 55840/21/NMI/nm)			L	13	233	40	)		
File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.		
22094-2_Technical manual	Technical manual	22094-2	09/10/2024	M.R		2	2/3		

### 22094-2: Portable Fire Extinguisher, 9 L Foam

#### • INSTALLATION

• USE

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

MAINTENANCE

The technician will carry out annual inspection for check the internal pressure and after all other steps planned during the fire extinguisher useful life.

Any tampering or operation performed by unqualified technician, void the product warranty. If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents. For installation, use and maintenance follow as indicated in file : PSP\_1\_ENG

#### **TECHNICAL SPECIFICATIONS**


FIRE RATING	43 A 233 B 40 F
EXTINGUISHING AGENT	Foam EWAB15 (2 % SC-6 + 10 % Inilam AX + 88 % Water) (* Hyper-filtered water with an osmosis process)
PROPELLANT	Dehumidified air or Nitrogen (N <sub>2</sub> ), 15 Bar at 20°C
TEMPERATURE RANGE	0°C / +60°C
NOMINAL CHARGE	9 Liters
FULL WEIGHT	~ 14,05 Kg
DIMENSIONS	Height (base - valve) 635 +/- 5 mm Diameter (cylinder) 170 +/- 2 mm
DISCHARGE TIME	~ 62,1 seconds
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	10,7 Liters
SAFETY DEVICE	Set between 20 and 24 bar
CYLINDER MATERIAL	Steel alloy
TREATMENT	Outside: Sandblast and powder painting Ral 3000 Inside: Plastic coating

#### PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

ON REQUEST: SINGLE PACKAGING - maximum 40 pieces on pallet 100x120

190 mm . 90



**STANDARD** 

Maximum nr. 40 pieces for pallet


(40 pieces for box, max 1 box for pallet) Pallet dimensions 100x120x80(h) cm

> TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594 Ship Transport : IMDG Code – UN 1044 class 2.2 Fire Extinguishers

I	File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22094-2	_Technical manual	Technical manual	22094-2	09/10/2024	M.R		2	2/3

## 22094-2: Portable Fire Extinguisher, 9 L Foam

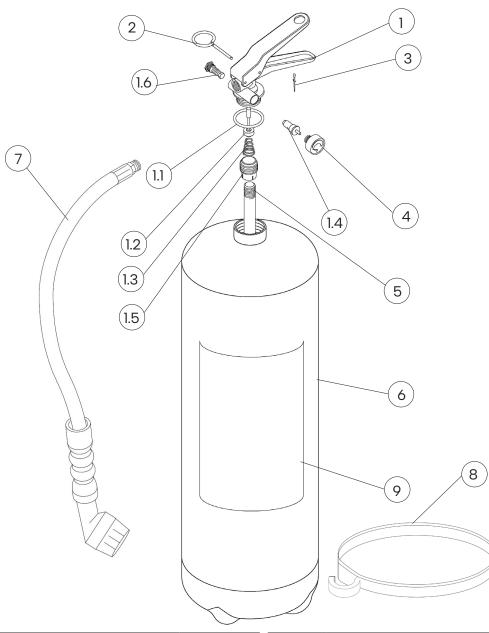

#### COMPONENTS AND SPARE PARTS LIST

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212CS
1.1	O-ring valve	0201C
1.2	Valve stem	0242C
1.3	Internal spring of the valve	0251C
1.4	Test valve for pressure gauge	1163C
1.5	Dip tube holder	0253C
1.6	Safety device	0261C
2	Safety pin	0282-1
3	Safety pin seal	0285
4	Pressure gauge	1576

NUM.	DESCRIPTION	CODE		
5	PVC dip tube	0155-1		
6	Cylinder	0111-2		
7	Hose with dispensing nozzle	0293-6		
8	Stop hose ring	1907		
9	Label	0077-6		
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036		
	Foam refill (9 L bottle, ready to use)	2055-1		

REPRODUCTION IS PROHIBITED

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
22094-2_Technical manual	Technical manual	22094-2	09/10/2024	M.R		2	3/3