Technical Manual





www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320

Other branches in Italy: Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

23058-2: Portable Fire Extinguisher, 5 Kg Carbon Dioxide



- CYLINDER
 Aluminum Alloy AA6061,
 external powder painting,
 color Red Ral 3000.
- EXTINGUISHING AGENT Carbon Dioxide 99,99 % (CO₂).
- VALVE
 Not magnetic M. 25x2, inox levers.
- USE
 Fire Rating class B (flammable liquids).

NOTE:

Fire extinguisher built with low magnetic conductivity components.

Note: image is for illustrative purpose only, the product purchased can has some difference

5 Kg Carbon Dioxide Fire Extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to UNI EN 3-7 (D.M. 7.1.2005), approved by Marine Equipment Directive MED 2014/90/EU, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with EN 3-10. Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:











FIRE RATING:



89

	File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
ſ	23058-2_Technical manual	Technical manual	23058-2	14/06/2024	M.R		2	1/3

PRODUCTION IS PROHIBITED

23058-2: Portable Fire Extinguisher, 5 Kg Carbon Dioxide

INSTALLATION

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

• MAINTENANCE

• USE

The technician will carry out annual inspection for check the charge and after all other steps planned during the fire extinguisher useful life

Any tampering or operation performed by unqualified technician, void the product warranty. If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents.

For installation, use and maintenance follow as indicated in file: EPC_1_ENG

TECHNICAL SPECIFICATIONS


FIRE RATING	89 B
EXTINGUISHING AGENT	Carbon Dioxide 99,99 % (CO ₂)
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	5 Kg
FULL WEIGHT	~ 12,3 Kg
DIMENSIONS	Height (base - valve) 670 +/- 5 mm Diameter (cylinder) 152 +/- 2 mm
DISCHARGE TIME	~ 11,5 seconds
CYLINDER PRESSURE TEST	PT 212 bar
CYLINDER VOLUME	7,5 L
SAFETY DEVICE	Set between 185 +/- 15 bar
CYLINDER MATERIAL	Aluminum Alloy AA6061
TREATMENT	Outside: Sandblast and powder painting, Ral 3000


PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD

Maximum nr. 48 pieces for pallet (48 pieces for box, 1 box for pallet)
Pallet dimensions 100x120x100(h) cm





ON REQUEST: SINGLE PACKAGING


TRANSPORT DISPOSAL

Land transport: Exemption for the purposes of ADR disposal 594 Ship Transport: IMDG Code – UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
23058-2_Technical manual	Technical manual	23058-2	14/06/2024	M.R		2	2/3

23058-2: Portable Fire Extinguisher, 5 Kg Carbon Dioxide

COMPONENTS AND SPARE PARTS LIST

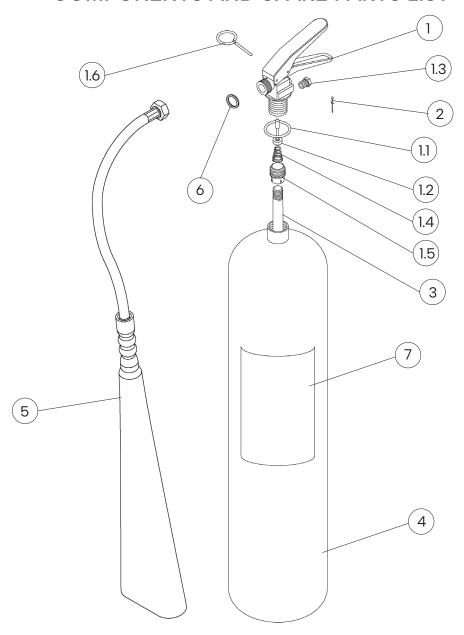

NUM.	DESCRIPTION	CODE		
1	Valve M. 25x2	0213-2		
1.1	O-ring valve	0202		
1.2	1.2 Valve stem			
1.3	1.3 Safety device			
1.4	1.4 Internal spring of the valve			
1.5	1.5 Dip tube holder			
1.6	1.6 Not-magnetic safety pin			
2	2 Safety pin seal			

NUM.	DESCRIPTION	CODE		
3	3 Aluminum dip tube			
4	Cylinder	0109		
5	Hose SAE 100 R1 T ½" with dispensing horn Europe model	0332-2		
6	Gasket in nylon	0204		
7	Label	2249		
OPTIONAL	Iron marine bracket red painting	1429		

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6
"n.a." mean that the component is not available as single spare part

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
23058-2_Technical manual	Technical manual	23058-2	14/06/2024	M.R		2	3/3