

# Technical Manual



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320  
 Other branches in Italy : Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

## 23058-32G : Portable Fire Extinguisher, 5 Kg Carbon Dioxide



OPTIONAL  
Adapter with clip



- **CYLINDER**  
Alloy steel, external powder coating, color Red Ral 3000, ogive color gray Ral 7037.
- **EXTINGUISHING AGENT**  
Carbon Dioxide 99,99 % (CO<sub>2</sub>) .
- **VALVE**  
Levian M. 25x2, brass body, lever red RAL 3000.
- **USE**  
Fire Rating class B (flammable liquids).

Note: image is for illustrative purpose only, the product purchased can has some difference

5 Kg Carbon Dioxide Fire Extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **UNI EN 3-7**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU. Manufactured according at productions checks as agreed with **EN 3-10**. Certified by **Benor**. Quality Product certification guaranteed by Bureau Veritas Italia. Suitable for use on fire involving electrical voltages up to 1000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE RATING :**



89

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
23058-32G_Technical manual	Technical manual	23058-32G	14/06/2024	M.R		2	1/3

# 23058-32G : Portable Fire Extinguisher, 5 Kg Carbon Dioxide

- **INSTALLATION**
- **USE**
- **MAINTENANCE**

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

The technician will carry out annual inspection for check the charge and after all other steps planned during the fire extinguisher useful life

Any tampering or operation performed by unqualified technician, void the product warranty.

If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents.

**For installation, use and maintenance follow as indicated in file : EPC\_1\_ENG**

## TECHNICAL SPECIFICATIONS


FIRE RATING	89 B
EXTINGUISHING AGENT	Carbon Dioxide 99,99 % (CO <sub>2</sub> )
TEMPERATURE RANGE	-20°C / +60°C
NOMINAL CHARGE	5 Kg
FULL WEIGHT	~ 14,0 Kg
DIMENSIONS	Height (base - valve) 740 +/- 10 mm Diameter (cylinder) 136 +/- 2 mm
DISCHARGE TIME	~ 10 seconds
VALVE TIGHTENING TORQUE	Minimum 60 Nm, Maximum 75 Nm
CYLINDER PRESSURE TEST	PT 250 bar
CYLINDER VOLUME	7,5 L
SAFETY DEVICE	Set between 186 and 212 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside: Sandblast and powder painting, Ral 3000 body, Ral 7037 ogive

## PACKAGING


(Note: quantities and measurements are indicative and can be subject at changes)

### STANDARD

Maximum nr. 65 pieces for pallet  
(65 pieces for box, 1 box for pallet)  
Pallet dimensions 100x120x100(h) cm

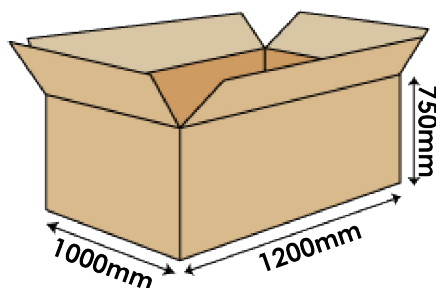

### ON REQUEST: SINGLE PACKAGING




## TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594  
Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
23058-32G_Technical manual	Technical manual	23058-32G	14/06/2024	M.R		2	2/3

# 23058-32G : Portable Fire Extinguisher, 5 Kg Carbon Dioxide

## COMPONENTS AND SPARE PARTS LIST

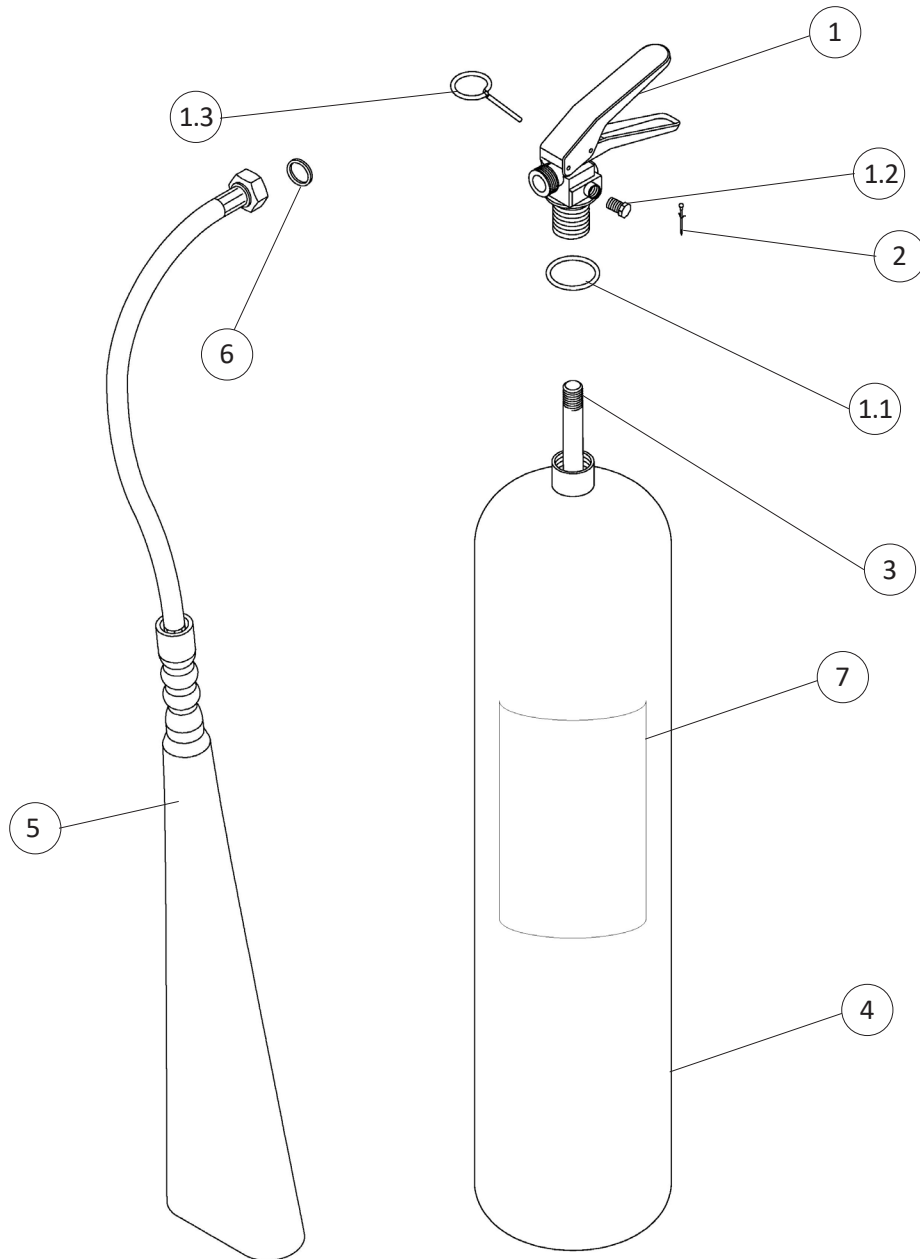

NUM.	DESCRIPTION	CODE
1	Valve M. 25x2	0213L
1.1	O-ring valve	0202
1.2	Safety device	n.a.
1.3	Safety pin	0282-1
2	Safety pin seal	0285
3	Aluminum dip tube	0160-4

NUM.	DESCRIPTION	CODE
4	Cylinder with gray ogive	0110-1G
5	Hose SAE 100 R1 T ½" with dispensing horn Europe model	0332-1
6	Gasket in nylon	0204
7	Label	2254-32G
OPTIONAL	Iron ring wall-mounted, red painting, adapter with clip	1907-2

The spare part at number 1 includes already all others components indicated from 1.1 to 1.3

"n.a." mean that the component is not available as single spare part

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
23058-32G_Technical manual	Technical manual	23058-32G	14/06/2024	M.R		2	3/3