

# Technical Manual



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320  
 Other branches in Italy : Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

## 25129 : Portable Fire Extinguisher, 12 Kg D Powder



Clip Detail



- **CYLINDER**  
In high-strength alloy steel, 3 pieces drawing, with clip, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**  
D Powder.
- **PROPELLANT**  
Dehumidified air or nitrogen (N<sub>2</sub>).
- **VALVE**  
M. 30x1.5, brass body, levers with red painting Ral 3000.
- **USE**  
D fire rating (fires arising from metals).

Note: image is for illustrative purpose only, the product purchased can has some difference

12 Kg powder fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 3-7**, certified according to the directive for pressure equipment PED 2014/68/EU.

Manufactured according at productions checks as agreed with **EN 3-10**.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 meter.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



**FIRE RATING :**



REPRODUCTION IS PROHIBITED

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
25129_Technical manual	Technical manual	25129	10/09/2024	M.R		2	1/3

# 25129 : Portable Fire Extinguisher, 12 Kg D Powder

- **INSTALLATION**
- **USE**
- **MAINTENANCE**

The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.

The technician will carry out annual inspection for check the internal pressure and after all other steps planned during the fire extinguisher useful life.

Any tampering or operation performed by unqualified technician, void the product warranty.

If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents.

**For installation, use and maintenance follow as indicated in file : EPP\_1\_ENG**

## TECHNICAL SPECIFICATIONS


FIRE RATING	D
EXTINGUISHING AGENT	D powder
PROPELLANT	Dehumidified air or Nitrogen (N <sub>2</sub> ), 15 Bar at 20°C
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	12 Kg
FULL WEIGHT	~ 18,1 Kg
DIMENSIONS	Height (base - valve) 610 +/- 5 mm Diameter (cylinder) 190 +/- 2 mm
CYLINDER PRESSURE TEST	PT 27 bar
CYLINDER VOLUME	12,5 L
SAFETY DEVICE	Set between 20 and 24 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside: Sandblast and powder painting, Ral 3000

## PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

### STANDARD

Maximum nr. 30 pieces for pallet  
(30 pieces for box, max 1 box for pallet)  
Pallet dimensions 100x120x75(h) cm

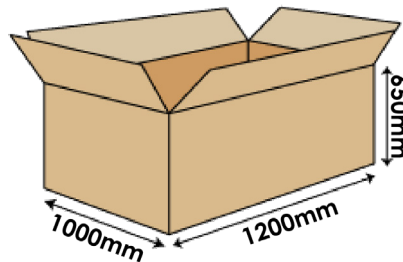


## TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594  
Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rel.	Check	Rev.	Pag.
25129_Technical manual	Technical manual	25129	10/09/2024	M.R		2	2/3

# 25129 : Portable Fire Extinguisher, 12 Kg D Powder

## COMPONENTS AND SPARE PARTS LIST

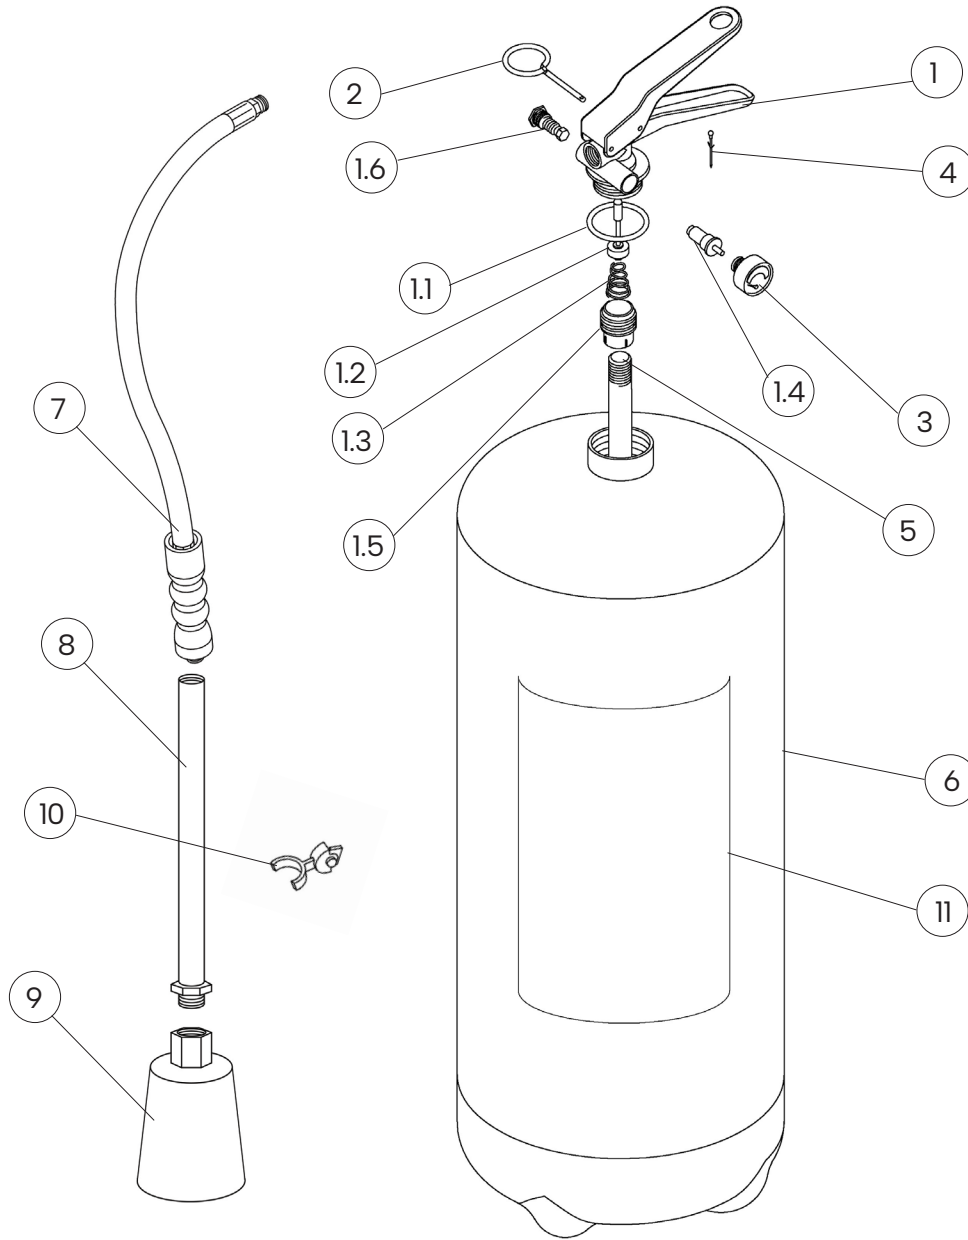

NUM.	DESCRIPTION	CODE
1	Valve M. 30x1.5	0212C
1.1	O-ring valve	0201C
1.2	Valve stem	0242C
1.3	Internal spring of the valve	0251C
1.4	Test valve for pressure gauge	1163C
1.5	Dip tube holder	0253C
1.6	Safety device	0261C
2	Safety pin	0282-1
3	Pressure gauge	0271-1
4	Safety pin seal	0285

NUM.	DESCRIPTION	CODE
5	PVC dip tube	0155-2
6	Cylinder	0105-8
7	Hose	SL0293
8	Steel tube	1778-2
9	Dispensing horn	2259-41
10	Magnet stop hose	0301-1
11	Label	9116
OPTIONAL	Wall-mounted bracket for fire extinguisher with clip	3036

The spare part at number 1 includes already all others components indicated from 1.1 to 1.6

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
25129_Technical manual	Technical manual	25129	10/09/2024	M.R		2	3/3