

Technical Manual



www.emme-italia.com

Via del Molino, 40 - 52010 Corsalone (AR) - Italy - info@emme-italia.com - Tel. +39.0575.511320
 Other branches in Italy : Milano - Padova - Roma - Palermo - Cagliari - P.IVA/ C.F. 11208251006 - R.E.A. AR-159122

18158-52 - Piemonte 18232 : Wheeled Fire Extinguisher, 150 Kg ABC Powder



Note: image is for illustrative purpose only, the product purchased can has some difference

- **CYLINDER**
In high-strength alloy steel, external powder painting Red Ral 3000.
- **EXTINGUISHING AGENT**
ABC powder - Map 40% .
- **PROPELLANT**
Auxiliary pressure.
Fire extinguisher pressurized at moment of use with CO₂ .
- **CAP**
2"-F , brass body.
- **USE**
A B C fire rating
(solid materials, flammable liquids, flammable gas.
- **BRACKET**
Chassis on wheels, welded at the cylinder, red painting Ral 3000.

REPRODUCTION IS PROHIBITED

150 Kg powder wheeled fire extinguisher, temperature range from -30°C to +60°C, manufactured in accordance to **UNI EN 1866-1**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a minimum distance of 1 m.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



For MED 2014/90/EU version:
cod. 16158-52

FIRE RATING :



File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
18158-52_ technical manual	technical manual	18158-52	22/10/2024	M.R		2	1/3

18158-52 - Piemonte 18232 : Wheeled Fire Extinguisher, 150 Kg ABC Powder

- **INSTALLATION** The installation and the control and/or recovery operations of fire extinguisher must be performed by qualified technician and in accordance to current regulations on the matter.
- **USE** The technician will carry out annual inspection for check the internal pressure
- **MAINTENANCE** and after all other steps planned during the fire extinguisher useful life.

Any tampering or operation performed by unqualified technician, void the product warranty.
If possible, is recommended to place fire extinguisher in a dry place, protected from atmospheric agents.

For installation, use and maintenance follow as indicated in file : CPA_1_ENG


TECHNICAL SPECIFICATIONS

FIRE RATING	A IV B C
EXTINGUISHING AGENT	ABC powder "Emme Powder 40" - MAP 40 % (QFIRE 40 - Quimica 21, S.L.)
PROPELLANT	CO ₂ - 2,5 Kg
TEMPERATURE RANGE	-30°C / +60°C
NOMINAL CHARGE	150 Kg
FULL WEIGHT	~ 210 Kg
DIMENSIONS	Height 1350 +/- 10 mm; Width 635 +/- 10 mm Depth 750 +/- 15 mm
DISCHARGE TIME	~ 92,3 seconds
CYLINDER PRESSURE TEST	PT 30 bar
CYLINDER VOLUME	170 Liters
SAFETY DEVICE	Set between 21 and 26 bar
CYLINDER MATERIAL	Alloy steel
TREATMENT	Outside : Sandblast and powder painting Ral 3000

PACKAGING

(Note: quantities and measurements are indicative and can be subject at changes)

STANDARD
Maximum nr. 1 piece for pallet
Pallet dimensions 100x120x150(h) cm

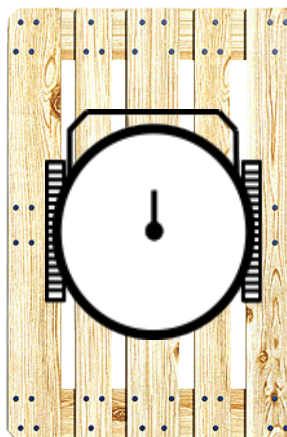


TRANSPORT DISPOSAL

Land transport : Exemption for the purposes of ADR disposal 594
Ship Transport : IMDG Code - UN 1044 class 2.2 Fire Extinguishers

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
18158-52_ technical manual	technical manual	18158-52	22/10/2024	M.R		2	2/3

COMPONENTS AND SPARE PARTS LIST

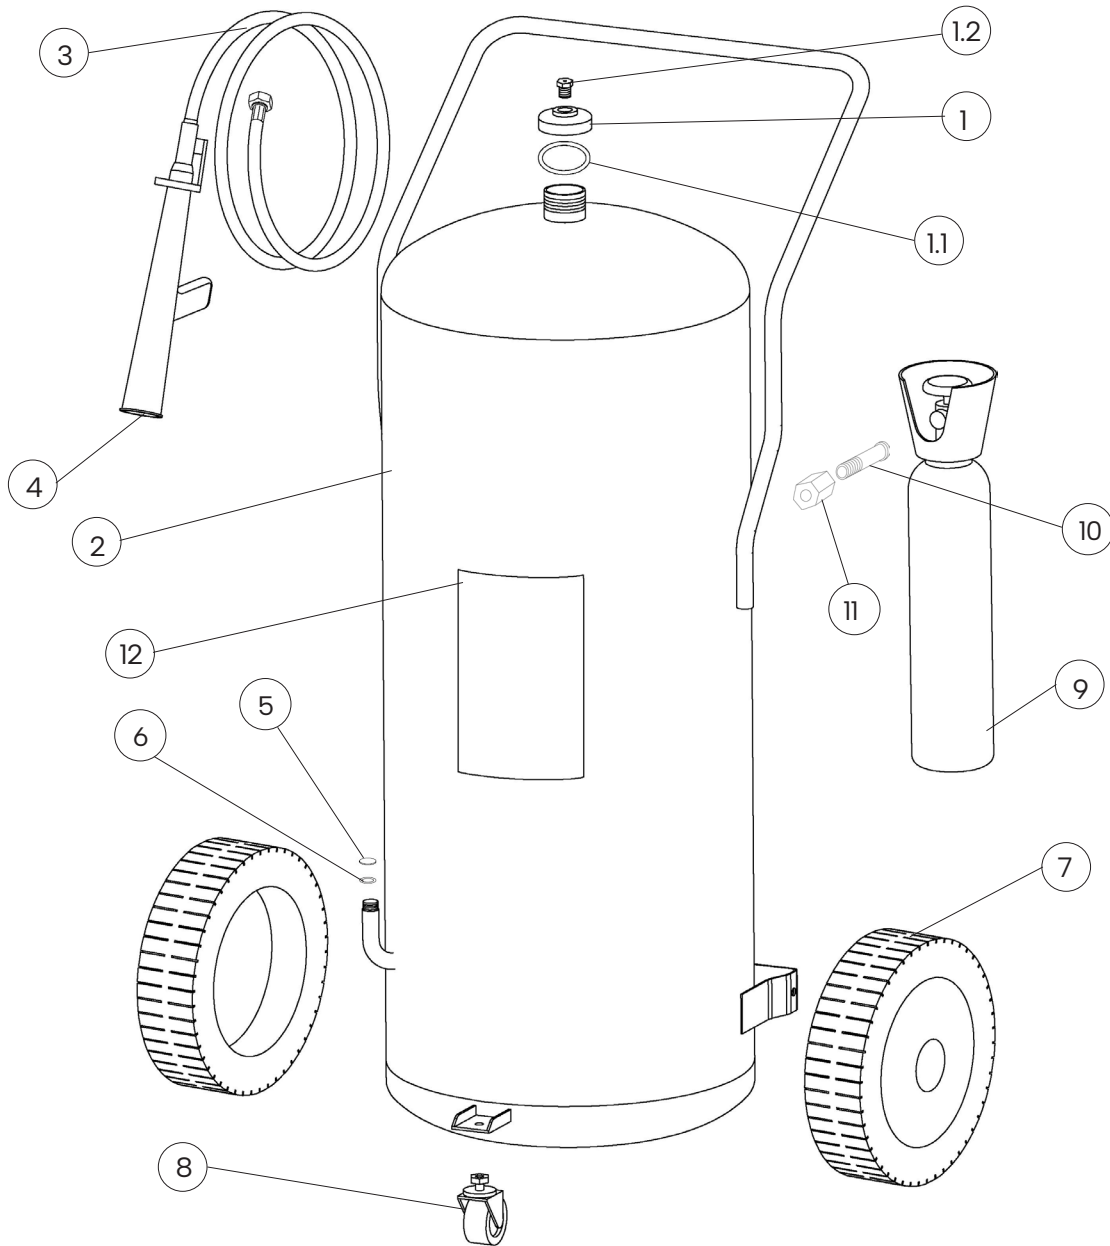

NUM.	DESCRIPTION	CODE
1	2" brass cap	18463
1.1	O-ring cap	n.a.
1.2	Safety device	n.a.
2	Cylinder	18315
3	Hose	18422-1
4	Dispensing lance (complete of ball valve with control lever)	2181-1
5	Membrane	0262-4
6	Copper washer	2148-11

NUM.	DESCRIPTION	CODE
7	Wheel (diam. 400mm)	0125
	Thick washer	2148-10
	Cotter pin stop wheel	9443
8	Front wheel	1686
9	Complete cylinder for pressurization	n.a.
10	Fitting for cylinder with nitrogen cylinder	18489
11	Fitting for nitrogen cylinder with cylinder	18495
12	Label 18158-52	18397
	Label 16158-52	18399M

The spare part at number 1 includes already others components 1.1 and 1.2
 "n.a." mean that the component is not available as single spare part.

File name	Type of document	Fire Extinguisher Model	Date	Rele.	Check	Rev.	Pag.
18158-52_ technical manual	technical manual	18158-52	22/10/2024	M.R		2	3/3